




Radiated Emission Measurement

Project No.: PT8026-F1

Data :#1

2022/5/12

14:33:21

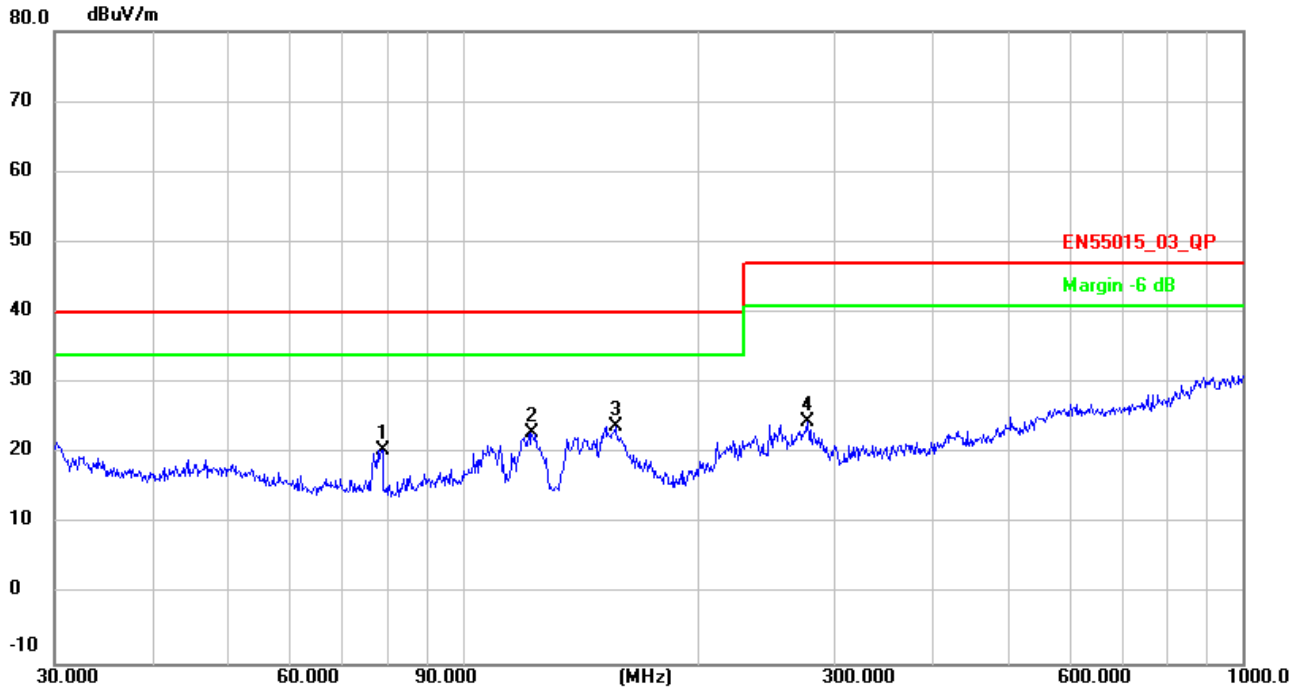

Site : RE Chamber 2

Polarization: **Horizontal**

Temperature: 26 (C)

Limit: EN55015_03_QP

Power: AC 230V/50Hz

Humidity: 54 %RH

EUT: Adaptor

M/N: PT8026-F1

Mode: 正常工作

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		78.9652	30.76	-10.21	20.55	40.00	-19.45	peak	
2		122.4040	33.36	-10.36	23.00	40.00	-17.00	peak	
3	*	157.0074	33.93	-10.00	23.93	40.00	-16.07	peak	
4		277.0935	30.26	-5.65	24.61	47.00	-22.39	peak	

*:Maximum data x:Over limit !:over margin




Radiated Emission Measurement

Project No.: PT8026-F1

Data :#2

2022/5/12

14:34:21

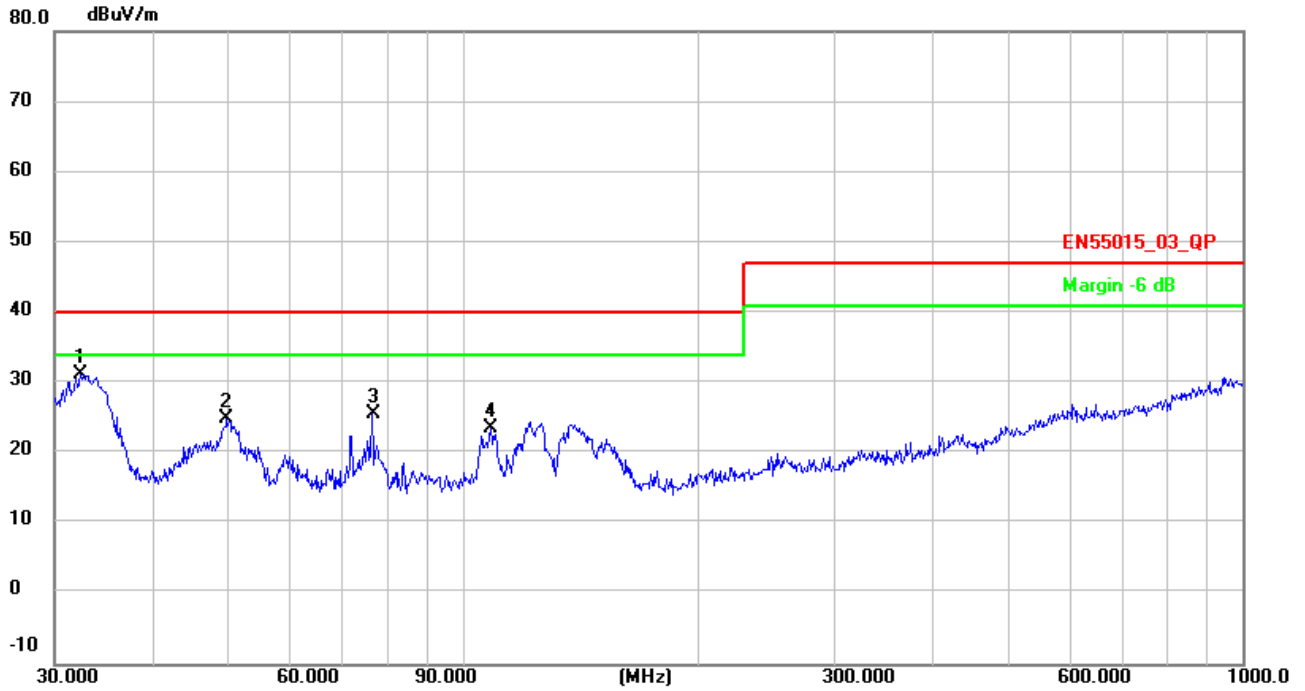

Site : RE Chamber 2
 Limit: EN55015_03_QP
 EUT: Adaptor
 M/N: PT8026-F1
 Mode: 正常工作
 Note:

Polarization: **Vertical**
 Power: AC 230V/50Hz
 Temperature: 26 (C)
 Humidity: 54 %RH

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	32.4059	39.89	-8.53	31.36	40.00	-8.64	peak	
2		49.8814	32.71	-7.63	25.08	40.00	-14.92	peak	
3		76.5121	35.83	-10.15	25.68	40.00	-14.32	peak	
4		108.6470	32.45	-8.72	23.73	40.00	-16.27	peak	

*:Maximum data x:Over limit !:over margin