




Radiated Emission Measurement

Project No.: PT8M2102S8

Data :#7

2022/5/12

14:46:27

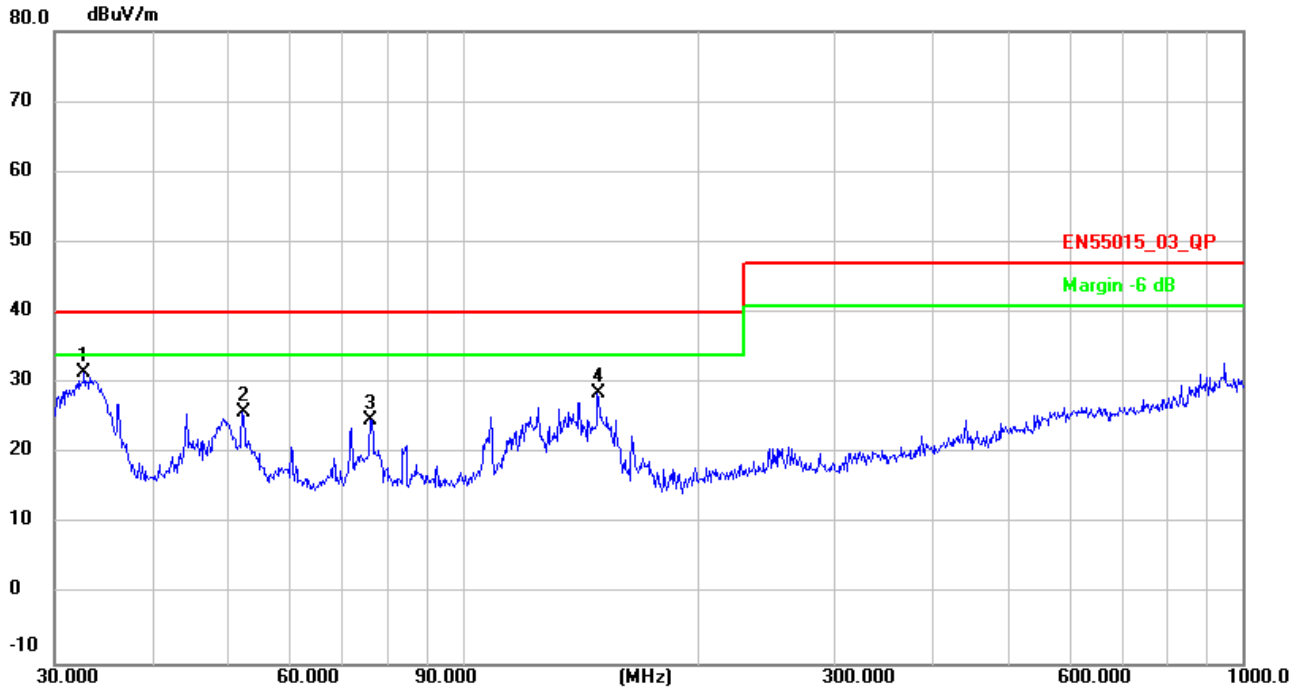

Site : RE Chamber 2

Polarization: **Vertical**

Temperature: 26 (C)

Limit: EN55015\_03\_QP

Power: AC 230V/50Hz

Humidity: 54 %RH

EUT: Adaptor

M/N: PT8M2102S8

Mode: 正常工作

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	32.7486	40.06	-8.47	31.59	40.00	-8.41	peak	
2		52.2079	33.87	-8.05	25.82	40.00	-14.18	peak	
3		76.2442	34.88	-10.14	24.74	40.00	-15.26	peak	
4		148.9625	39.07	-10.41	28.66	40.00	-11.34	peak	

\*:Maximum data x:Over limit !:over margin




Radiated Emission Measurement

Project No.: PT8M2102S8

Data :#8

2022/5/12

14:48:39

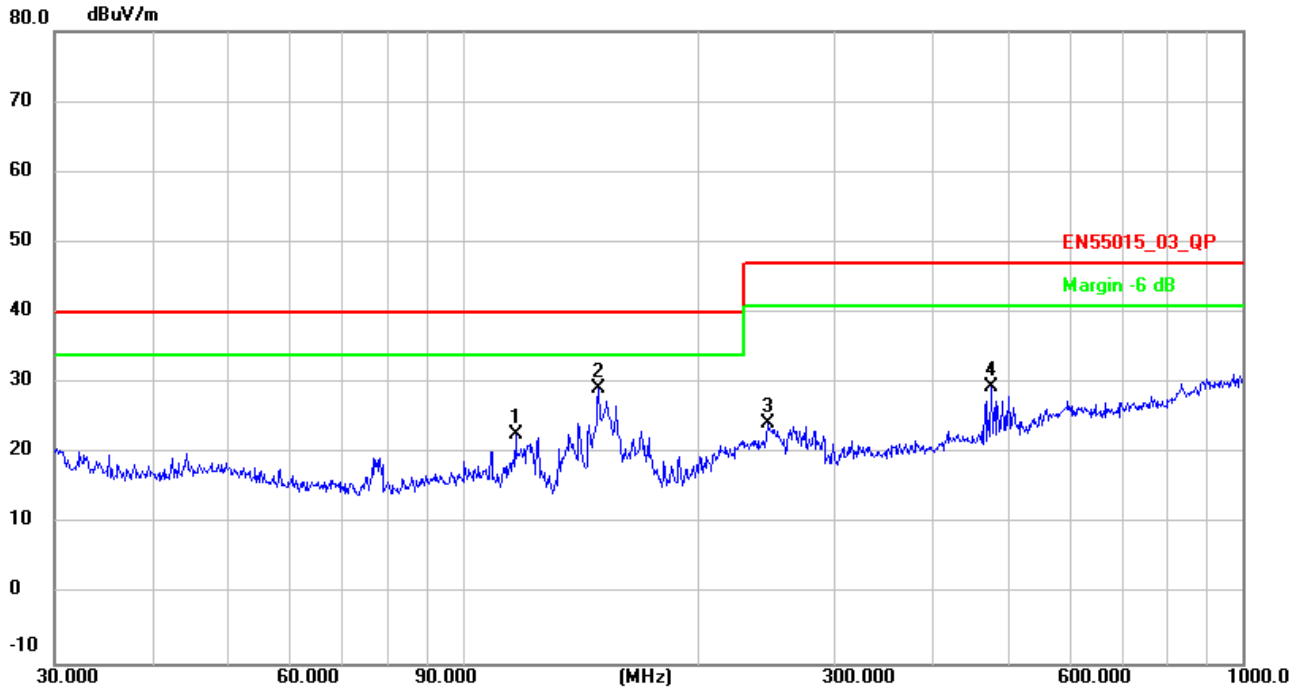

Site : RE Chamber 2

Polarization: **Horizontal**

Temperature: 26 (C)

Limit: EN55015\_03\_QP

Power: AC 230V/50Hz

Humidity: 54 %RH

EUT: Adaptor

M/N: PT8M2102S8

Mode: 正常工作

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		116.9495	32.54	-9.78	22.76	40.00	-17.24	peak	
2	*	149.4857	39.67	-10.39	29.28	40.00	-10.72	peak	
3		245.9509	30.37	-6.03	24.34	47.00	-22.66	peak	
4		475.4991	33.03	-3.48	29.55	47.00	-17.45	peak	

\*:Maximum data x:Over limit !:over margin